

TECHNICAL SPECIFICATION

Specification	AirCleanerQ
Dimensions (LxWxH)	550 x 550 x 154 mm
Housing material	Painted aluminium / stainless steel
Weight	approx. 8 kg
Number of ionisation tubes	2 pcs (IRD)
Power supply	110–240 V AC, 50 Hz
Power consumption	max. 30 W
Power levels	3
Control	Automatic & remote control
Sensor	VOC sensor
Operating temperature	+5 °C to +40 °C
Humidity	max. 85 % rH
Noise level	< 28 dB (A)
Room volume	up to 170 m ³
Standards	2014/35/EU, 2014/30/EU
Scope of delivery	2 sets of adapter rails for grid sizes 600 x 600 mm and 625 x 625 mm

MAXIMUM ROOM VOLUME

low load	medium load	high load
170 m ³	85 m ³	30 m ³

Note: the values apply to standard operation at medium ionisation output. At higher or lower output levels the recommended room volumes change accordingly.

Low load

Offices, meeting rooms, private homes (without special requirements), etc.

Medium load

Food and kitchen odours, moderately used changing rooms and washrooms, gyms, etc.

High load


Food production, waste rooms, smoking rooms, heavily used washrooms, etc.

INSTALLATION IN SUSPENDED CEILINGS

Suitable for grid ceilings with 600 x 600 mm and 625 x 625 mm modules – adapter rails for both grids are included. Installation height 154 mm.

AirCleanerQ

Dimensional drawing · all dimensions in mm

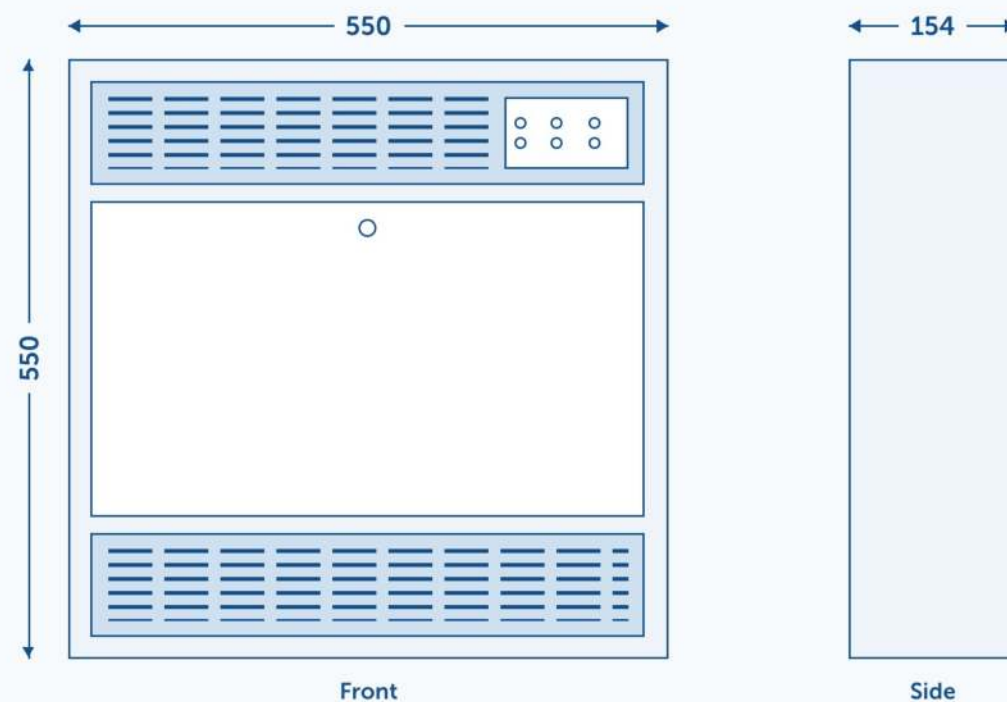

bioclimatic GmbH
Im Niedernfeld 4
D-31542 Bad Nenndorf

Contact
T +49 5723 9440-0
info@bioclimatic.de

More about the product
[bioclimatic.de](https://www.bioclimatic.de)

